



# PHOENIX 100 MINI POWER STATION



## RENOGY PHOENIX 100 MINI POWER STATION

Engineered with 21700 lithium-ion batteries, Renogy PHOENIX 100 Mini Power Station is a perfect fusion of portability and convenience. Housed in an ultra-compact design, the massive 27000mAh capacity provides enough juice for essential gadgets no matter where you are. Multiple charging options meet the needs of both mobile devices and home appliances up to 100W, thanks to the built-in AC output.

### KEY FEATURES



#### Maximum Protection

Keep both the mini power station and your devices from damage with overcharge, short circuit, and current surge protection.



#### Rapid Heat Dissipation

Cool down the battery efficiently while blocking out the dust with built-in air vents and dust sheets.




#### Uncompromised Quality

Top-notch 21700 battery cells with extreme high energy density ensure more than 1000 charge cycles and extended service life.



#### Multiple Charging Options

USB ports together with AC outlet power up both mobile devices and home appliances up to 100W.

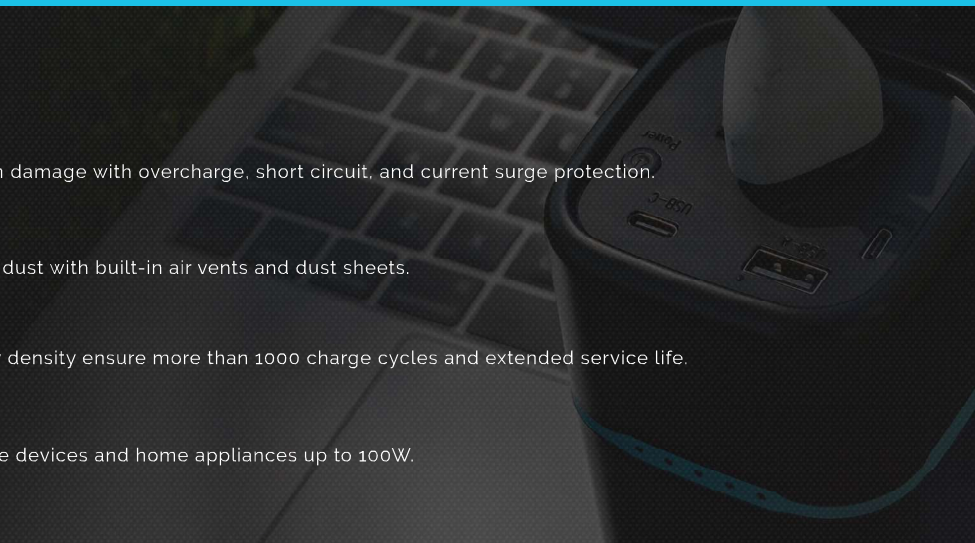

## Specifications

<b>Model</b>	R-PB005
<b>Capacity</b>	27000mAh / 97.2 Wh
<b>Dimensions</b>	2.7 x 2.7 x 6.1 inch / 6.9 x 6.9 x 15.4 cm
<b>Weight</b>	17.8 oz / 705 g

## Input

<b>Micro USB</b>	DC 5V / 2A Max
<b>USB-C</b>	DC 5V / 3A Max
<b>Micro USB+USB-C</b>	DC 5V / 5A, 25W Max

## Output

<b>USB-A</b>	DC 5V / 2.4A Max
<b>USB-C</b>	DC 5V / 3A Max
<b>AC Output</b>	AC 110V / 60Hz, 85W Rated / 100W Max

